

Transport Equipment | Stokvis Group



Dimensions

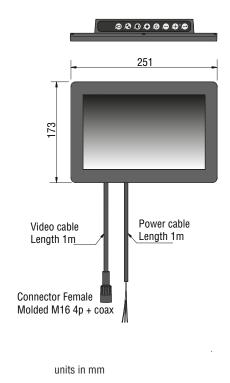

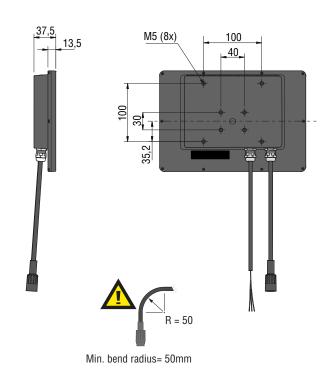

TECHNICAL DATA

Monitor 10" HLED 1

Description

Article number 0224000

Cables / Connectors 1m multicable (power) open wired, 1m multicable (video) with 4p + Coax molded female connector

Weight 0,82kg (Monitor, cables and connectors)

General

Type 10,1inch TFT LCD module with a white LED backlight.

Resolution WXGA 1280 x RGB x 800 pixels.

Active Area 216.96 (H) x 135.60 (V) (10.1" diagonal).

Driver element a-Si TFT active matrix.

Softwaremenu Full On-Screen-Display (OSD) functionality in 13 languages.

ABC mode Improved Auto Brightness Control (ABC) including one-touch day/night setting and adjustable minimum and maximum levels

for automatic control.

Operating temperature -40°C...+85°C.

Electrical

Input voltage range 12V/24V/DC Power consumption 12W@24V.

Protection: Above 33V overvoltage protection, protection deactivated below 30V.

Below 7V undervoltage protection, protection deactivated above 8V.

Protected against load dumps, spikes and surges, reverse polarity on all wiring.

Power-output: For powering camera. Output current 1A max. Power output is input voltage, protected against load dumps, spikes, surges and

reverse polarity.

Video input Coax GMSL.

Mechanical

Surface Hard coating (3H), with AG LR (Low Reflection) polarizer.

Housing Color Black, material: high impact automotive synthetic thermoplastic polymer.

Protection IP54 according IEC60529.

Temperature/humidity test According IEC60068-2-1/2/3/14/30/38.

Certification

Quality & environment Units are manufactured by Orlaco in the Netherlands; ISO 9001, ISO14001, ISO/TS 16949.



