

Vision is
our mission®


WIEGEL
Transport Equipment | Stokvis Group

Cable 21m ow m4F
Article no. 0302150
2018 • DS0960089 EN A 01

Product Data




Dimensions

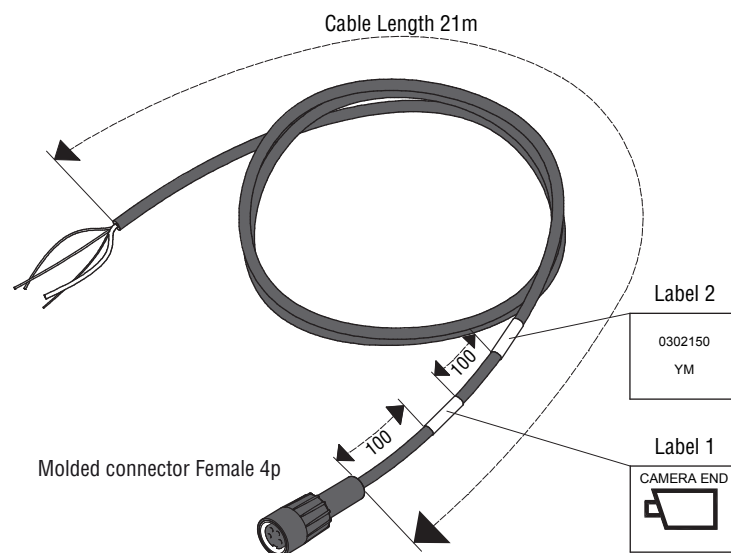

TECHNICAL DATA

Cable 21. ow m4F

Article number	Description 0302150
Cable	Multicable 1 x coax + 2 x power + 1 x data, Art. No 1220110.
Shield	Tinned copper, braided $\geq 85\%$.
Coax	Coax Cable 26AWG 19 x 0,10 mm, Core: CU-ETP1 according DIN EN 13602. Shield tinned copper braided $\geq 85\%$. Sheath PP.
C1 to C3 Conductor	3 x AWG22, 7 x 0,25mm, tinned copper. Color: Black, Red, Orange.
Jacket	TPE-U Sh A 85 +/-5; Halogen Free, overall diameter 6mm +0,0/-0,2mm, Color: Black RAL 9005.
Temperature range	-40°...+85°C.
Min. bending radius	7,5 x Diameter (Static).
Coax impedance	70 Ω
Approvals	Chemical Resistance: Oil, Mud. Fire resist: IEC 60332-3. Halogen free: DIN VDE 0472 part 815.
Cable length	21m
Connector	Molded connector Female 4 pins.



Electrical connection

Molded connector Female 4p
1 = Coax = Video
2 = Coax shielding = Video GND
3 = Red = Power output
4 = Black = 0V

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

WIEGEL

Transport Equipment | Stokvis Group



 **ORLACO**
Specialised Camera Solutions

Carolus Clusiuslaan 3
2215RV Voorhout
T +31(0)88 7865300
E info@wiegel.eu

wiegel.eu