


Adapter cable 0,25 PL monitor m4F Article no. 0304990 2017 • DS0960240 EN A 01

Vision is our mission®

Product Data



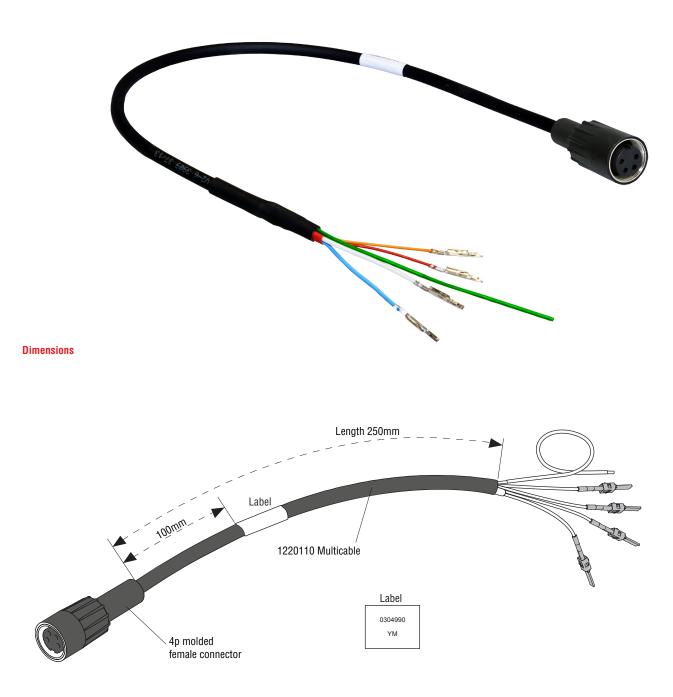



TECHNICAL DATA

Adapter cable 0,25 PL monitor m4F

Article number Cable Diameter Material jacket Length Max. Bend radius Temperature range Connector Weight Installation Manual Description

0304990 Multicable, Article No. 1220110. 6mm +0,0/-0,2mm. TPE-U Sh A 85 +/-5; Halogen Free, Color: Black RAL 9005. 260mm. 7,5 x Diameter (Static). -40°C...+85°C. 4pins female molded connector. 0.075kg (including package). Available; see Manual IM0973450

Installation

A30 A29 A28 A27 A26 A25 A24 A23	A14 A13 A12 A11 A10 A9 A8
A22 A21 A20 A19 A18 A17 A16 A15	A7 A6 A5 A4 A3 A2 A1

ŀ	Conne	ections	connect	or A
 	C1	C2	C3	C
<u>'</u>	A8	A14	A24	0
)	A5	A4	A3	W
) }	A9	A13	A12	R
3	A19	A18	A17	BI
	-	-	-	G
7				

Function
Cam-ctrl
Video core
24V/DC
Video shield/GND
Connect to chassis




Image connector A

Layout connector A



Front side of molded female connector

1 = Coax core	= Video signal
2 = Coax screen	= Video GND
3 = Red	= 24V/DC
4 = Black	= GND
Shielding	Connect to housing



The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable. All products are manufactured in accordance with the ISO 9001 quality management events are 100 TE All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.



Carolus Clusiuslaan 3 2215RV Voorhout **T** +31(0)88 7865300 E info@wiegel.eu

