

Mast cable 1x coax + 5x wire PUR FL Article no. 1220600 2018 • DS0960425 EN A 01

Product Data

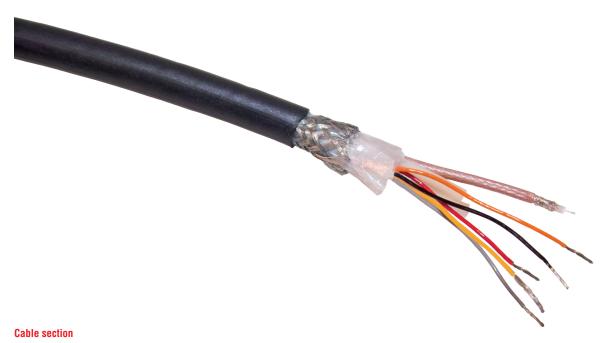

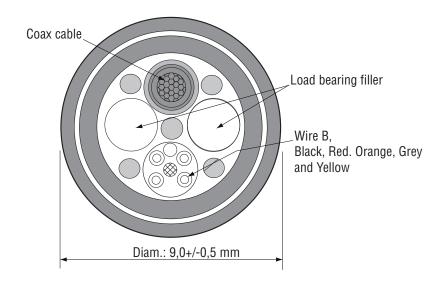

TECHNICAL DATA

Mast cable 1x coax + 5x wire PUR FL

Description

Article number 1220600

Coax Cable 7 x 0,10 mm SCWS

Colour: Transparant white.

Wire B 5 x AWG24 19 x 0,13mm TPC

Colour: Black, Red, Orange, Yellow, Grey.

Fillers 2 x Loadbearing

Sheath Overall diameter 9,0mm +/_0,5mm (Max), Colour: Black.

Shield Braided TPC braid, coverage > 85%.

Temperature range $-40^{\circ}...+85^{\circ}$ C. Impedance Coax 75Ω

Approvals UV-resistant, oil resistant and Halogen free.

Art No 0403330

Wires according UL Style 1589 Cable according UL Style 20963

Fire resistance VW1 (UL 1581).

Accessories Art No 0403330; Pulley, see also data sheet DS0403330.

Art No 0403340; Springset mast cable forklift, see also data sheet DS0403340. Art No 0403390; Spring plates forklift, see also data sheet DS0403390.

Note: Application/service life Cable is designed for use on pulleys with a minimum diameter of 80mm and minimum width between flanges of 10mm. Guarantied service life is 2 years. Consult Orlaco sales representative for other applications.







Art No 0403390

Transport Equipment

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.





