



Vision is
our mission®

Product Data

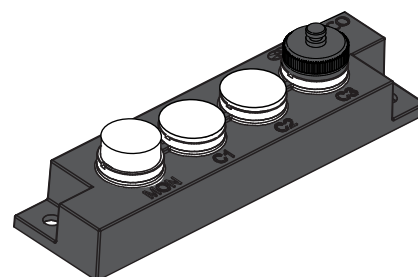

Dimensions

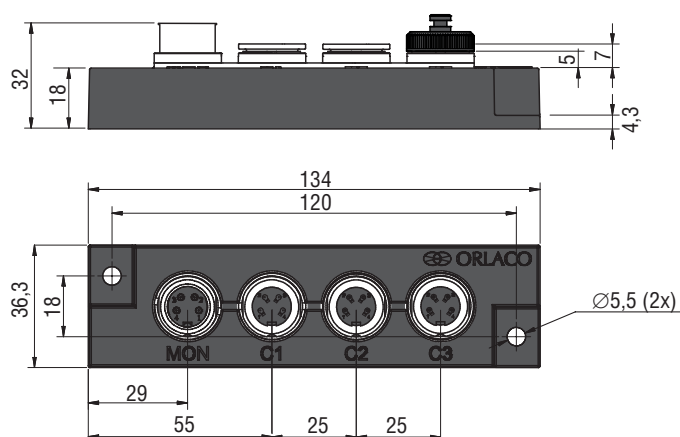

units in mm

Switcher UNI serie IP67

Article number

0404080

Description

Inputs and power supply for at the maximum of 3 cameras and even in combination with a Y-split cable 4 cameras, output for monitor, waterproof IP67.

Camera input

3 inputs PAL/NTSC, 1V/pp

Monitor output

PAL/NTSC, 1V/pp

Power input

12V/DC $\pm 1,5V$ from the monitor

Housing

POM, black

Protection

IP67

Weight

0,149kg

Operating temperature

-40°C to +85°C.

Electrical connection


Front side sockets

1 = Coax core = Video signal


2 = Coax shielding = Video GND

3 = Red = 12V/DC

4 = Black = 0V



Front side
Female 4p socket




Front side
male 4p socket

Application

Example of application of a switcher in a typical system (with Monitor 7" LEDD)

Important: The maximal length between the switcher and the monitor is 20 m

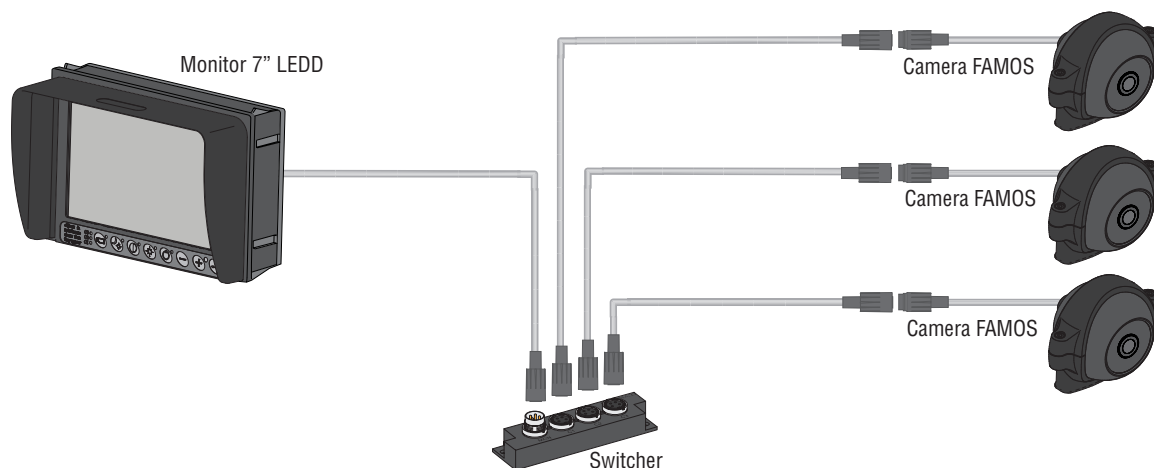

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

WIEGEL

Transport Equipment | Stokvis Group